


HR Rotor-9000Bu

Artikel 1679

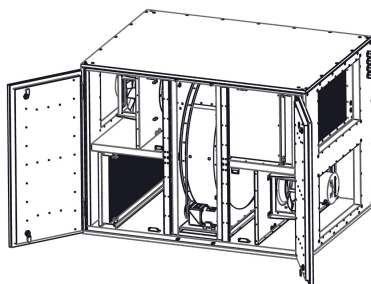

		Supply	Extract
Air flow	[m ³ /h]	9000	9000
External pressure	[Pa]	250	250
Inlet temperature, summer	[°C]	28	21
Relative humidity, summer	[%]	50	60
Inlet temperature, winter	[°C]	-10	21
Relative humidity, winter	[%]	95	50

Unit SFP	[W/(m ³ /s)]	2013.11
----------	-------------------------	---------

Heat exchanger, summer

Supply			Extract		
Temperature after heat exchanger	[°C]	22.57	Temperature after heat exchanger	[°C]	26.43
Relative humidity after heat exchanger	[%]	69.06	Relative humidity after heat exchanger	[%]	43.27
Exchange efficiency dry	[%]	77.56	Exchange efficiency dry	[%]	77.6
Exchange efficiency wet	[%]	0	Exchange efficiency wet	[%]	0
Heat recovery wet	[kW]	-16.58			

Heat exchanger, winter

Supply			Extract		
Temperature after heat exchanger	[°C]	14.03	Temperature after heat exchanger	[°C]	-2.87
Relative humidity after heat exchanger	[%]	33.3	Relative humidity after heat exchanger	[%]	100
Exchange efficiency dry	[%]	77.5	Exchange efficiency dry	[%]	77
Exchange efficiency wet	[%]	29	Exchange efficiency wet	[%]	76
Heat recovery wet	[kW]	85.29			

Fans, winter

EC fan, backward curved impeller
 Rated power = 2550W(3.4Hp)
 Phase/voltage [50/60Hz/VAC] ~3, 380/480
 Insulation class B
 Motor protection class IP 54

Supply fan, winter			Extract fan, winter		
RPM	[1/min]	1644.13	RPM	[1/min]	1654.99
Electric power consumption	[W]	2491.36	Electric power consumption	[W]	2541.41
Current, A	[A]	3.86	Current, A	[A]	3.94
Total fan pressure, Pa	[Pa]	610.94	Total fan pressure, Pa	[Pa]	627.94
Static fan pressure, Pa	[Pa]	533.9	Static fan pressure, Pa	[Pa]	550.9
Static fan efficiency η_{es}	[%]	53.58	Static fan efficiency η_{es}	[%]	54.19
Airflow at operating point	[m³/h]	9000	Airflow at operating point	[m³/h]	9000
Power rated	[W]	2550	Power rated	[W]	2550
Current rated	[A]	3.9	Current rated	[A]	3.9
Control voltage	[V]	9.65	Control voltage	[V]	9.72
Sound pressure level to environment @3m	[dB(A)]	41.44	Sound pressure level to environment @3m	[dB(A)]	41.44

Fans sound power, winter Lw, (dB)

Sound power level	Gen.	Octave frequency bands [Hz]							
		63	125	250	500	1000	2000	4000	8000
Lwa (to inlet)	80	50	59	69	74	74	73	70	63
Lwa (to outlet)	87	54	62	72	80	83	80	75	67
Lwa (to environment)	62	47	53	60	52	50	47	42	35

Fans sound power, winter Lw, (dB)

Sound power level	Gen.	Octave frequency bands [Hz]							
		63	125	250	500	1000	2000	4000	8000
Lwa (to inlet)	80	51	59	69	74	74	73	70	63
Lwa (to outlet)	87	54	61	72	80	83	80	75	67
Lwa (to environment)	62	47	52	60	52	50	47	42	35

SFP, winter

Unit external SFP, real at operation point [W/(m³/s)] 2013.11

Filter

592*287*600 - ePM2,5 70% ISO16890 / F7 EN 779:2012, pocket type, meltblown, galvanized frame / MERV 13 (ASHRAE 52.2)
 Frames 23.3x11.3x23.6inch.

Dampers

Multi-blade damper for air flow control

The housing made of galvanized steel. The aluminium blades driven by plastic gearwheels. Lever with removable metal handle and fixing clamp. Standard connection flange for rectangular air ducts or other ventilation system components. Flanges should be connected with galvanized bolts and clamps.


Casing

Double skin frameless casing with 40 mm (1.5inch) mineral wool 90 kg/m³; non-flammable; outer skin: zinc-aluminum; inner skin: zinc-aluminum; EN1886 class: D1, T2, TB4.
 Insulation class B

Units	L	L1	L2	W	H	S3	H1	E2	S1	S2
mm	2090	770	550	1738	1815	1200	600	170	505	360
inch	82	30	22	68	71	47	24	7	20	14

Unit Weight (without water cooler , DX coil, water heater), [Kg] - 950, [lb] - 2094

Electric heater weigh , [Kg] - 57, [lb] - 126

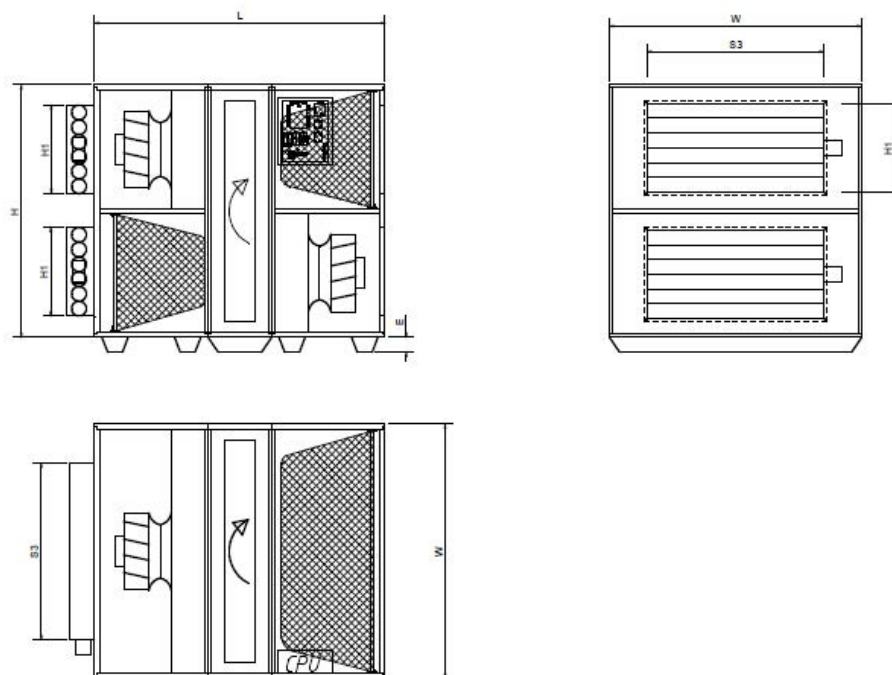


ERP

Trade mark		Air-Transfer
Model		HR Rotor-9000Bu
Declared typology		NRVU BVU
Type of drive installed		Integrated MSD
Type of heat recovery system		Rotary
Thermal efficiency of heat recovery	[%]	77.5
Supply flow rate	[m ³ /s]	2.5
Effective electric power input	[W]	5032.77
SFPint	[W/(m ³ /s)]	1085.15
Face velocity at design flow rate	[m/s]	1.8
External pressure	[Pa]	250
Internal pressure drop of ventilation components	[Pa]	283.9
Static efficiency of fans	[%]	53.58
Maximum leakage rates	[%]	2.7
Maximum leakage rates	[%]	2.7
Filtration class		B
Visual filter warning		Visual filter warning
Sound power level	[db]	61.98
Internet address		www.air-transfer.nl

Erp 2018 compliant according to Commission Regulation EU No 1253/2014, 7 July 2014

Left service side

Right service side

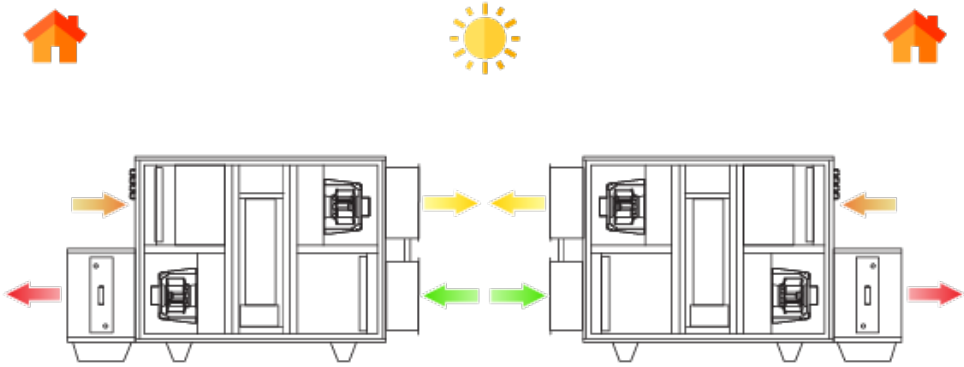

Supply air Fresh air Extract air Exhaust air